



Electromagnetic Energy Conversion

ELEC0431

Exercise session 5: Synchronous machines

8 March 2024

Florent Purnode (florent.purnode@uliege.be)

Montefiore Institute, Department of Electrical Engineering and Computer Science,
University of Liège, Belgium

In this class...

- Three-phase synchronous motors
- Three-phase synchronous generators (alternators)
- Exercise 10

Three-phase synchronous motors


Stators in three-phase motors

Magnetic field in three-phase motors


Three-phase synchronous motors

Stators in three-phase motors


Let's consider a simple stator for a three-phase motor connected in a star configuration:

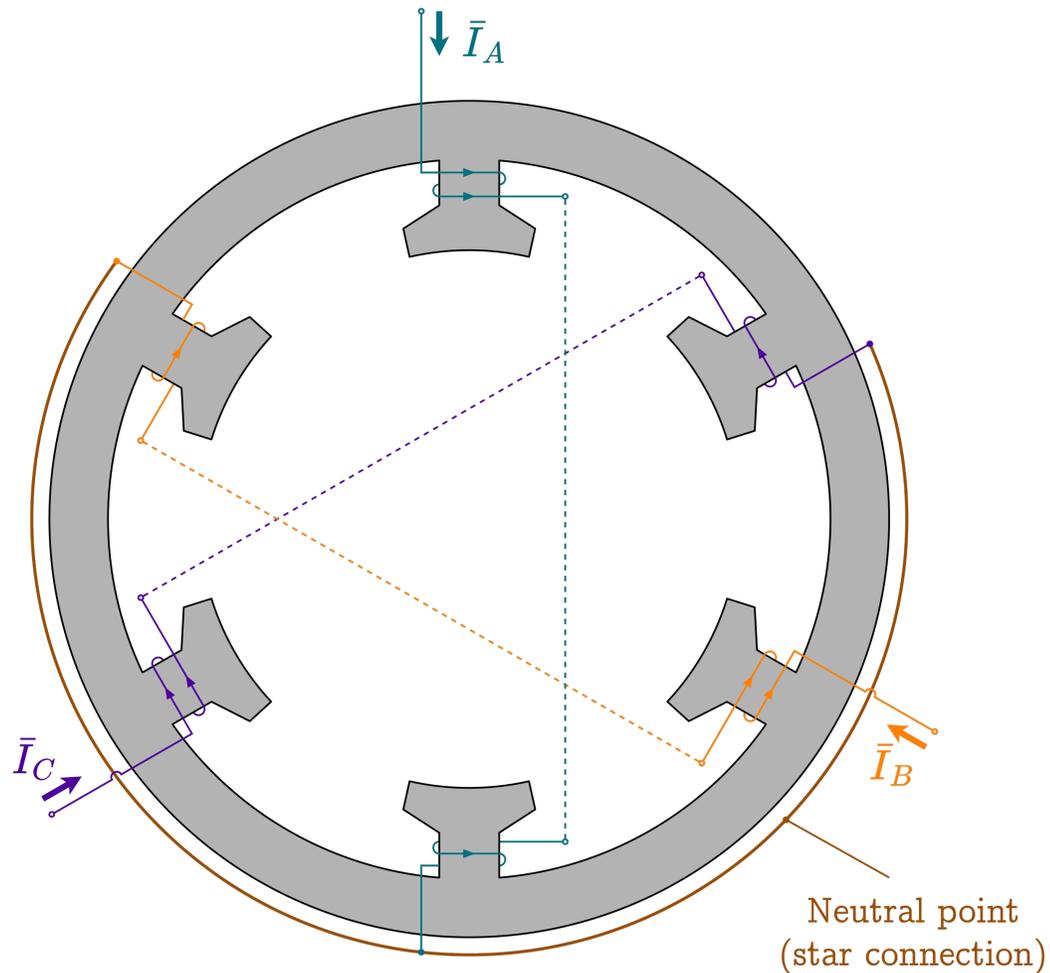

It is powered by a balanced three-phase electrical grid so that the currents \bar{I}_A , \bar{I}_B and \bar{I}_C are out of phase by 120° and have equal peak amplitude I_p .

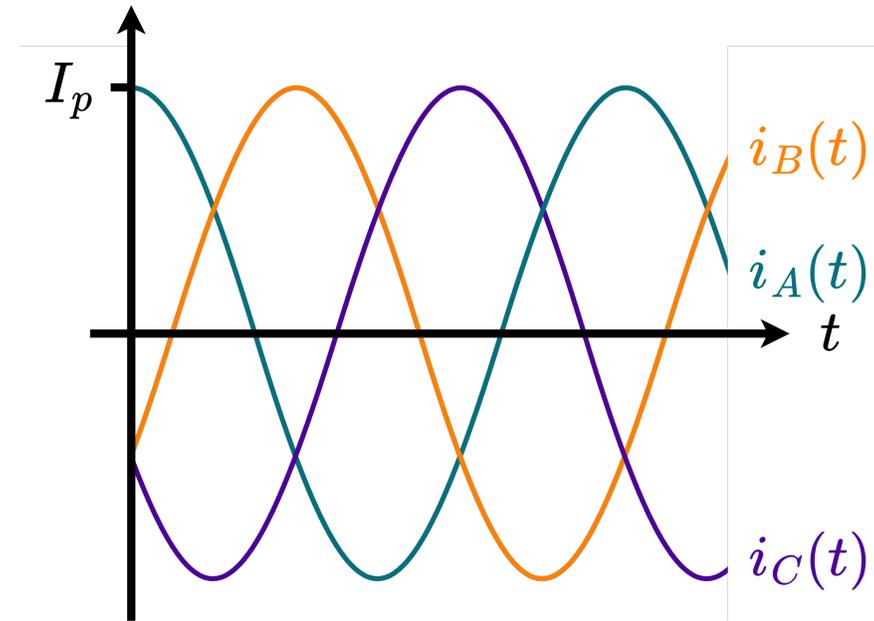

Magnetic field in three-phase motors

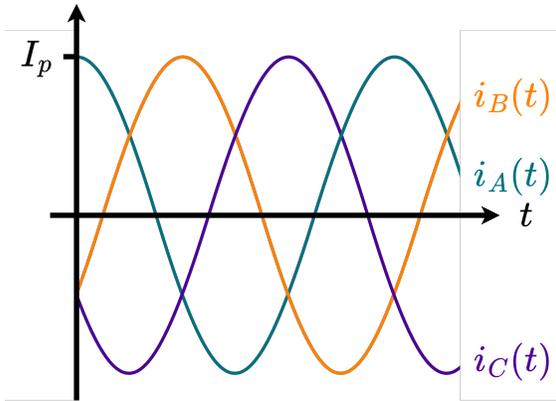

At $t = 0$:


- $i_A(0) = I_p$
- $i_B(0) = -\frac{I_p}{2}$
- $i_C(0) = -\frac{I_p}{2}$

The resulting magnetic field \vec{H} is the sum of \vec{H}_A , \vec{H}_B and \vec{H}_C .

By ampere's law, we know these currents will generate magnetic fields.


As a first approximation, we consider that

i_A generates \vec{H}_A ,
 i_B generates \vec{H}_B and
 i_C generates \vec{H}_C .

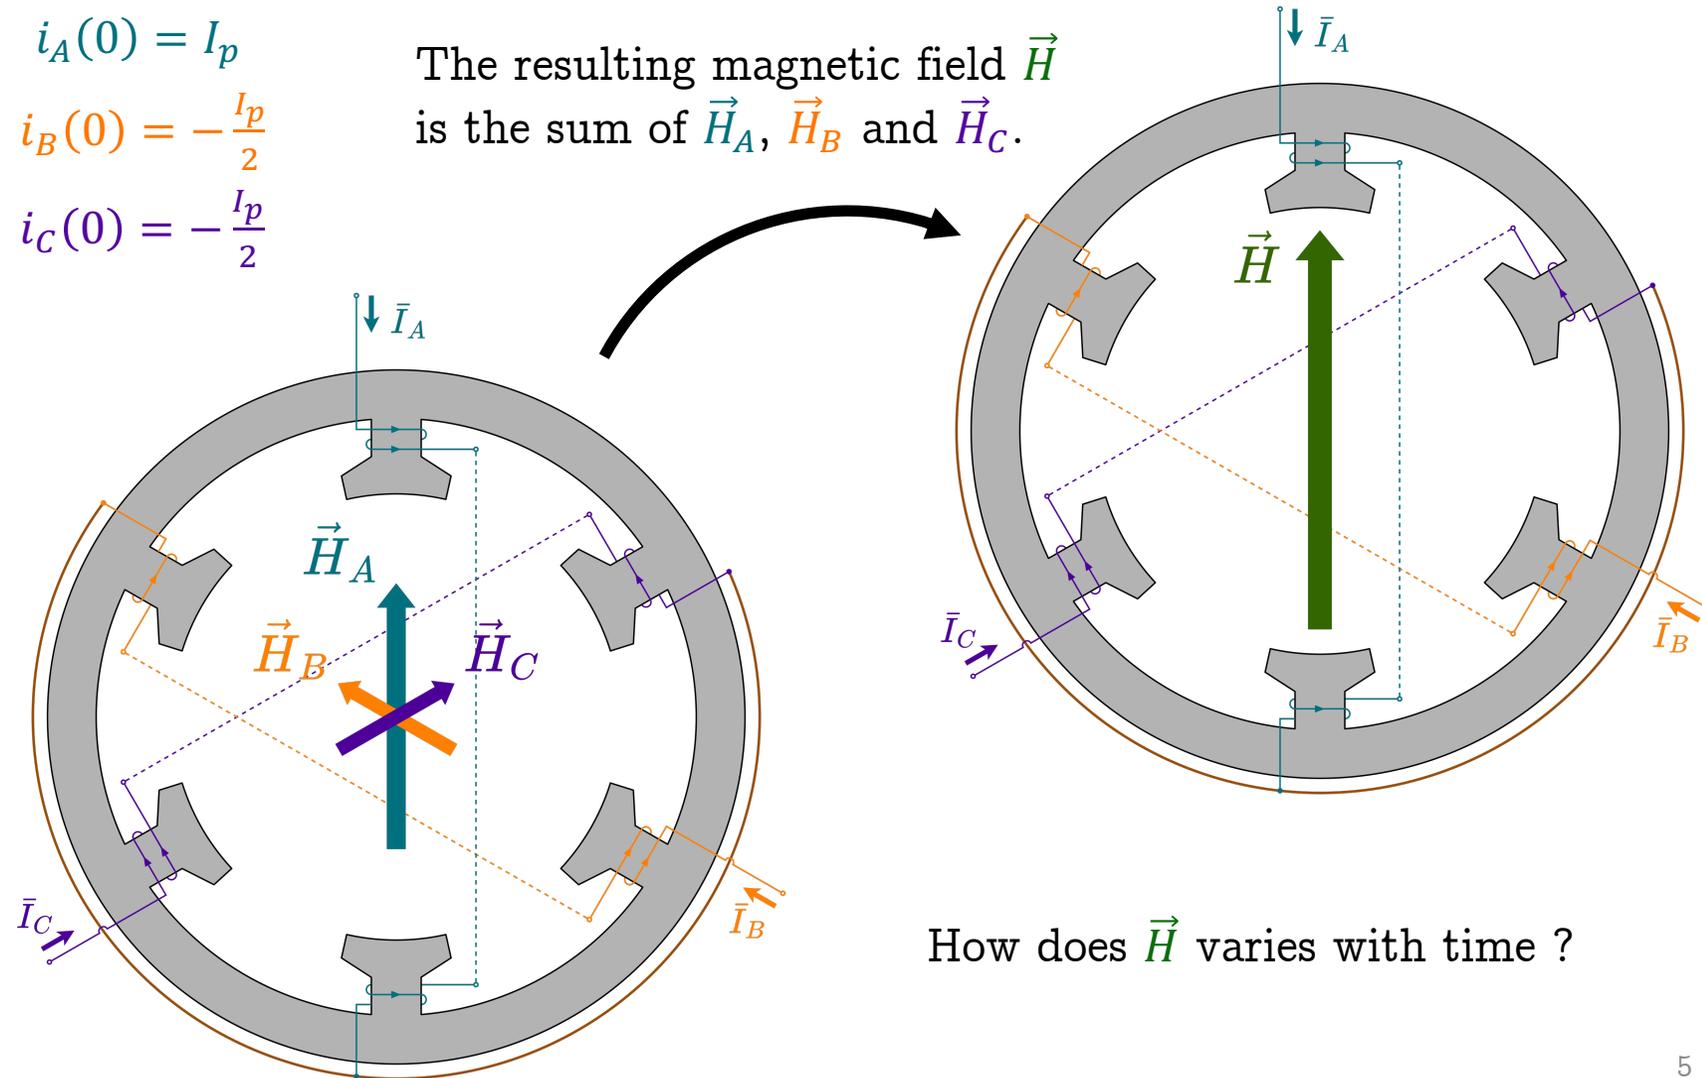

How does \vec{H} varies with time ?


Magnetic field in three-phase motors

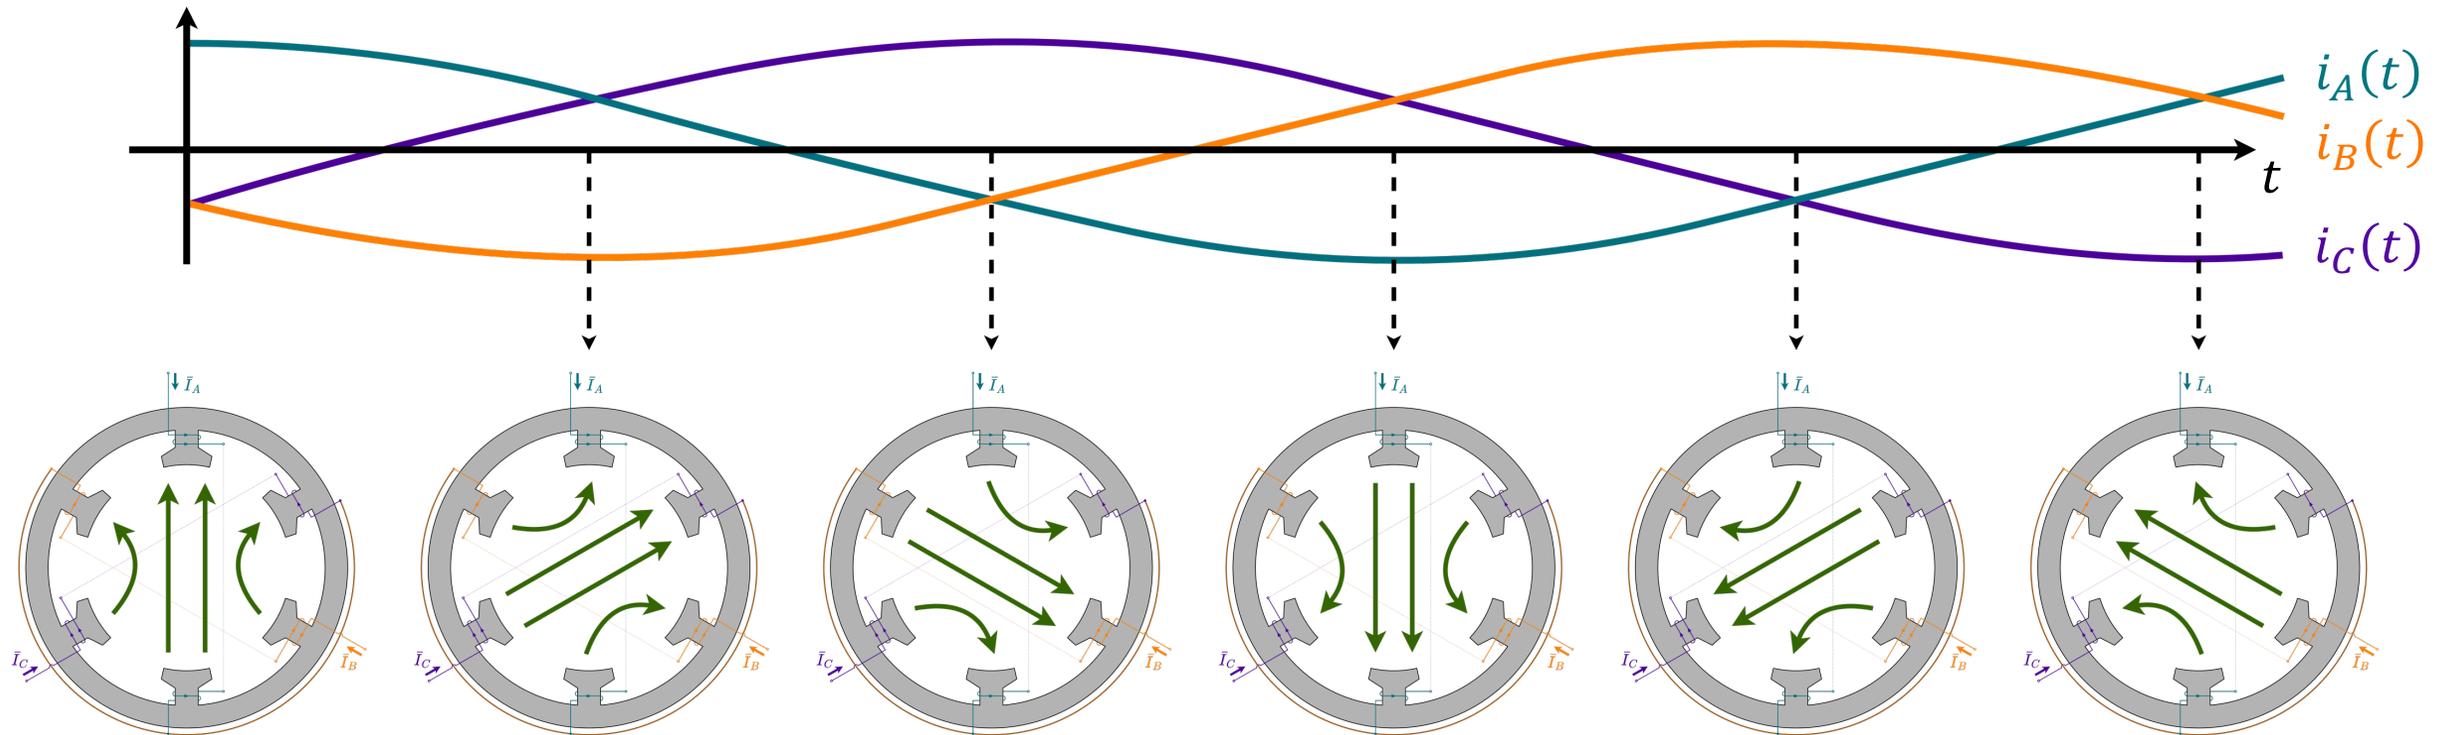


The magnetic field generated in the stator is constant in amplitude and rotates at the frequency of the three-phase power source.

Three-phase synchronous motors

One can put a permanent magnet or an electromagnet in the stator. In both cases, they will align with the magnetic field and rotate at the same frequency as the three-phase power source → Synchronous motor

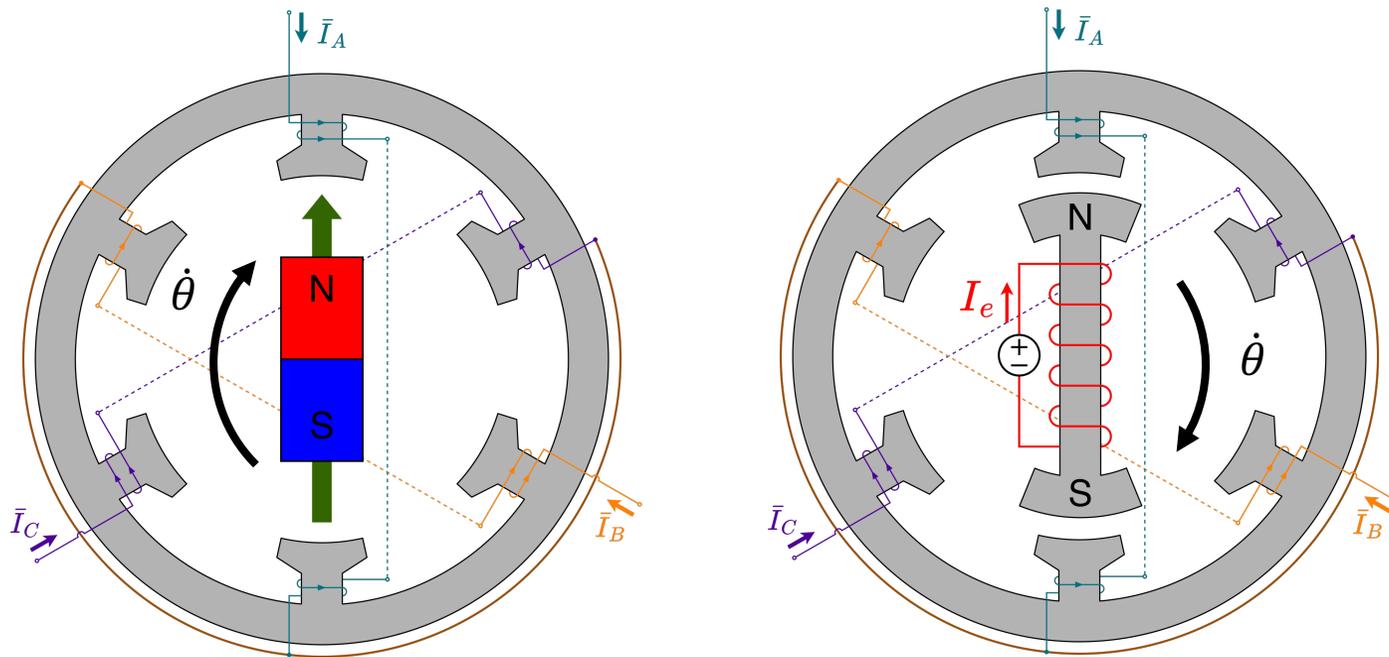

Note that electromagnets use ferromagnetic materials exhibiting hysteresis and saturation:

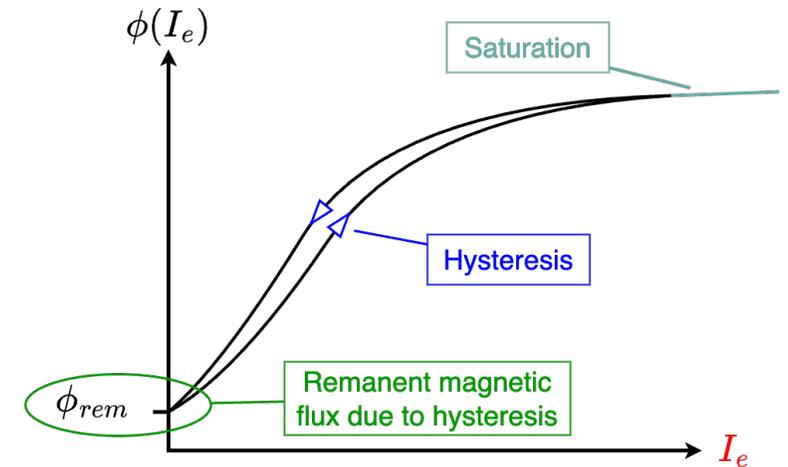

Three-phase synchronous generators (alternators)

Induced emf \bar{E}_v


Behn-Eschenburg's model

Number of (pairs of) poles

Exercise 10

Induced emf \bar{E}_v

Three-phase synchronous generators and three-phase synchronous motors are built similarly.

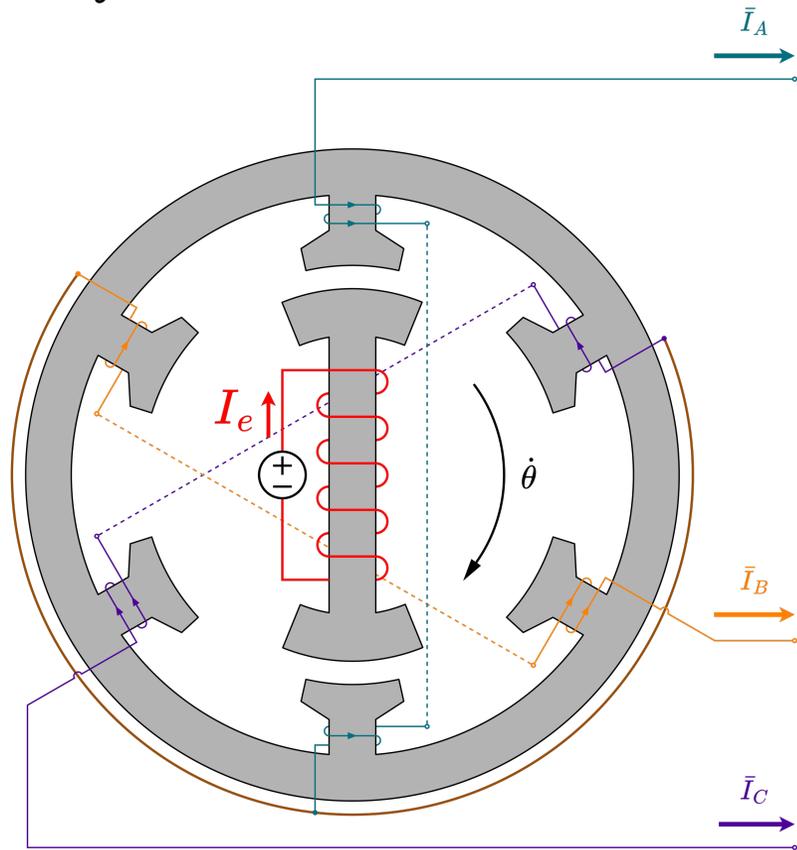

An electromagnet generates a flux $\phi(I_e)$, rotating with the shaft of the machine.

As the magnetic flux perceived by the stator windings varies, it produces an emf, whose amplitude is proportional to $\frac{d\phi(I_e)}{dt}$.

Since it rotates at a speed $\dot{\theta}$, $\frac{d\phi(I_e)}{dt}$ is proportional to $\dot{\theta} \phi(I_e)$.

The RMS amplitude E_v of the produced emf is thus given by:

$$E_v = k_e \dot{\theta} \phi(I_e),$$


with k_e a scaling factor to determine.

Behn-Eschenburg's model

The emf \bar{E}_v generated in one phase is not directly equal to the corresponding output phase voltage \bar{V} . This is due to:

- the stator leakage fluxes,
- the armature reaction,
- the wire resistance.


When the ferromagnetic materials are not saturated, we can account for these effects using the Behn-Eschenburg's model:

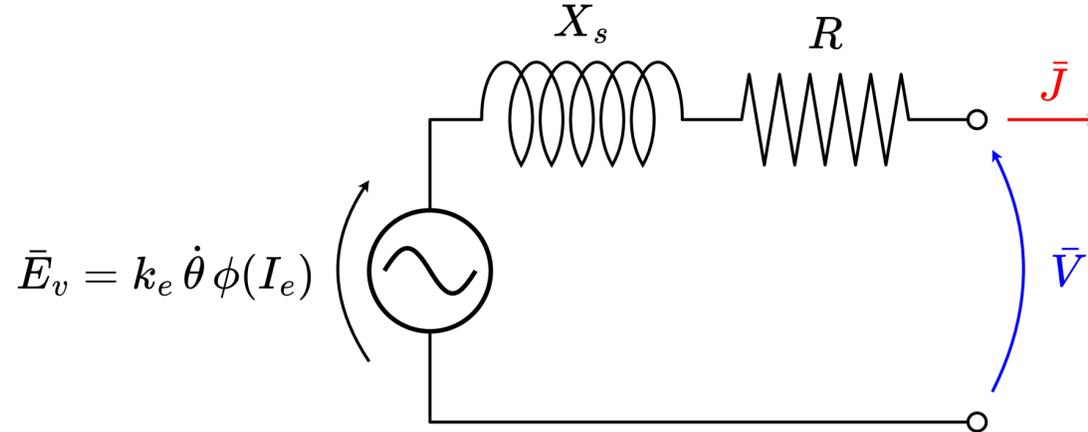


Note:

- Often, $X_s \gg R$.
- Without any load, $\bar{J} = 0$ and $\bar{E}_v = \bar{V}$.

Number of (pairs of) poles

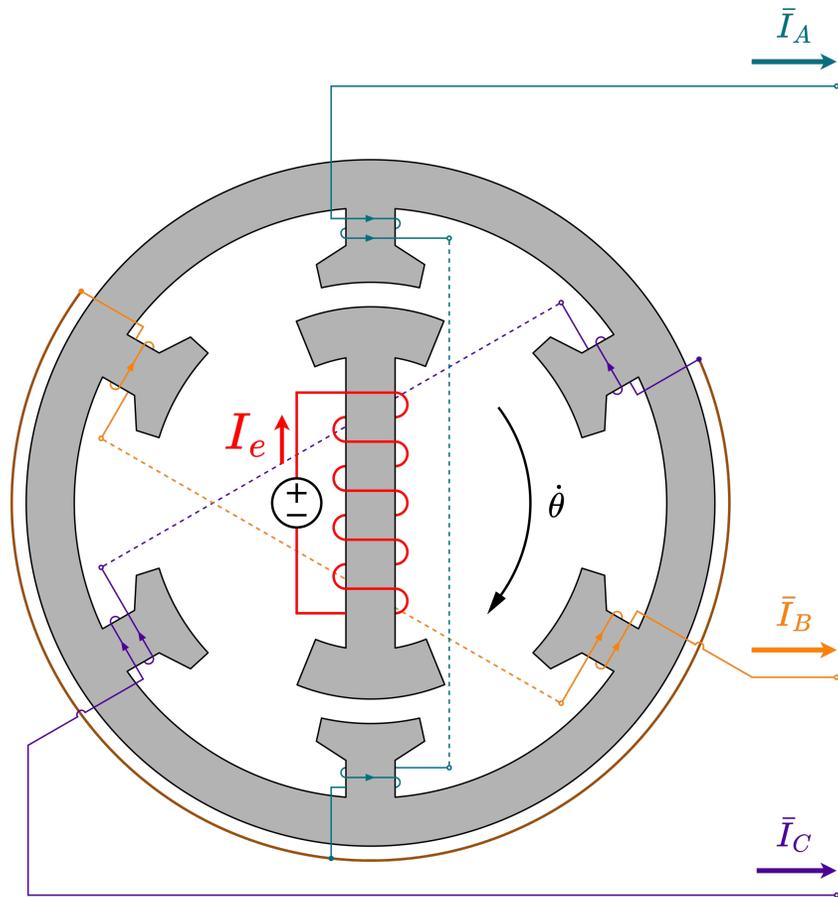

Each phases has two poles
→ One pair of poles ($p = 1$)

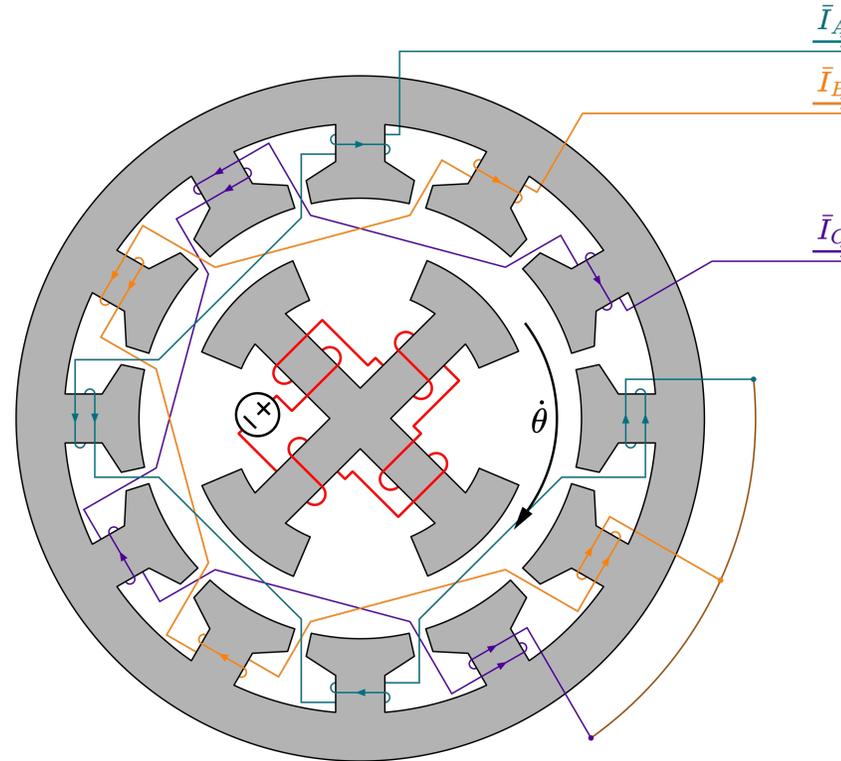

Each phases has four poles
→ Two pairs of poles ($p = 2$)

The number of pairs of poles p links the speed of rotation $\dot{\theta}$ to the pulsation ω of the currents and voltages:

$$\dot{\theta} = \frac{\omega}{p}$$

Exercise 10: Three-phase turbo-alternator

Turbo-alternators are alternators coupled to turbines allowing to convert the mechanical power of a moving fluid (steam or liquid) to electrical power. In this exercise the turbo-alternator has the following nominal characteristics:

- Power $P_n = 600 \text{ MW}$
- Frequency $f_n = 50 \text{ Hz}$
- Speed of rotation $\dot{\theta}_n = 3000 \text{ RPM}$
- Power factor $\cos \phi_n = 0.9$
- Line voltages $U_n = 20 \text{ kV}$
- Ferromagnetic losses $p_f = 543 \text{ kW}$
- Mechanical losses $p_m = 1.35 \text{ MW}$
- Rotor resistance $R_e = 0.17 \Omega$
- Excitation system efficiency $\eta_e = 0.92$
- Stator phase resistance $R = 2.3 \text{ m}\Omega$.

To characterize the turbo-alternator three tests have been performed:

- Using open stator windings, at the nominal speed of rotation $\dot{\theta}_n$, the RMS direct voltage values have been measured with respect to the RMS current intensity I_e flowing through the inductor (table on the right).
- When turning at the nominal speed of rotation $\dot{\theta}_n$, using short-circuited stator windings and an excitation current I_e of 1.18 kA , an RMS current equal to half the nominal RMS value flows in each of the stator windings.
- When turning at the nominal speed of rotation $\dot{\theta}_n$, connecting an inductive load and using an excitation current I_e of 2.085 kA , an RMS current equal to half the nominal RMS value flows in each of the stator windings for an RMS line voltage of 10 kV .

I_e [A]	E_v [kV]
400	5.2
700	9.1
963	11.5
1200	13
1450	14
1900	15

Exercise 10: Three-phase turbo-alternator

1. Calculate the nominal RMS intensity I_n of the stator currents.
2. Compute the total losses and the turbo-alternator efficiency at the nominal operating point, knowing the RMS excitation current value is $I_e = 3.2 \text{ kA}$ and that the alternator is in star configuration.
3. Calculate the mechanical power the turbine must provide for each of the considered test.

Using Behn-Eschenburg diagram with the experimental measurements and neglecting resistive losses in the rotor:

4. Calculate the (unsaturated) synchronous reactance X_s of the turbo-alternator.
5. Plot the Behn-Eschenburg diagram for the nominal operating point.
6. Compute the RMS value E_v of the synchronous electromotive force.
7. Draw the internal lag angle δ_{int} and give its value.